

ROCKET STAR SIGNAL KM25

In compliance with the Regulation of Ship's Life-saving Equipments Japan.

This hand-held Free-Falling Red Star Signal is provided with propellant mechanism in a rocket and is designed for safety to the operator to feel no recoil of the rocket when it is fired.

It is recommended to use this signal as an alternative of Rocket Parachute Flare.

This signal is improved suitably for an operator wearing immersion suit.

APPLICATIONS:

For use on ship's .

PERFORMANCE:

Ejects three red stars at 300m altitude and stars burn for 4 seconds with 60,000 candela.

DIMENSIONS & WEIGHT:




41mm diameter, 218mm long, 330g

EFFECTIVE PERIOD:

3 Years and 6 Months

OPERATION USE WHEN VESSEL OR AIRCRAFT IS SIGHTED.

- (1) Hold signal vertically, remove bottom black rubber cap.
- (2) Pull bottom ring until it stops. Turn it upwards.
- (3) Hold signal with both hands firmly and upright.
Keep top above the level of head, slightly downwind.
Squeeze top of ring holder with base of thumb, then rocket is fired.

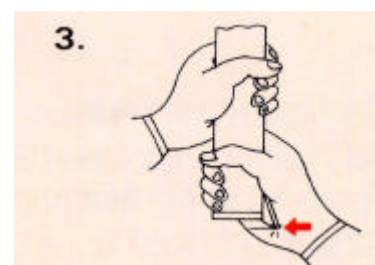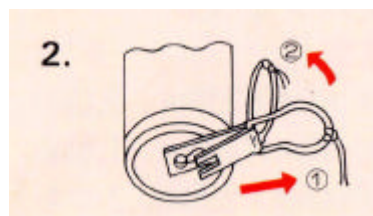

WARNING

- Do not point at people.
- Do not attempt to test this mechanism except in distress.
- Do not use signal except in distress.

APPROVED MANUFACTURER BY M.L.I.T. JAPAN

KOA KAKO CO.,LTD.

2-13-9, Higashi-Nihonbashi, Chuo-ku, Tokyo, Japan

<http://www.koa-kako.co.jp>

e-mail:sales@koa-kako.co.jp

Tel:81-3-5835-2924

Fax:81-3-5835-1041