

BUOYANT SMOKE SIGNAL KM46S

In compliance with the requirements of the 1996 Amendments to the International Convention for the SOLAS, 1974, LSA code and IMO Resolution **M S C . 8 1 (7 0)**

This Buoyant Orange Smoke is suitable for use daylight distress signalling.

This Smoke Signal has a simple ignition device to pull off ignition cord on a top, and is capable of function on oil covered water.

DIMENSIONS & WEIGHT

85mm diameter, 140mm long, 500g

APPLICATIONS:

For use on small crafts and in ship's life-boats and life-rafts.

PERFORMANCE:


Produces dense orange smoke for 3 minutes.

EFFECTIVE PERIOD:

3 Years and 6 Months

OPERATION

- (1) Remove adhesive tape on top.
- (2) Hold ignition cord firmly. Pull sharply in vertical direction
Keep face and body away from emission point.
After 2 seconds, it begins to smoke.
- (3) Throw signal into water downwind.

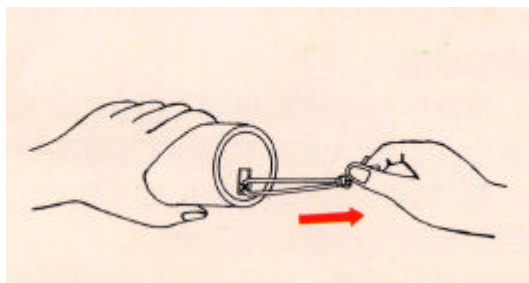

CAUTION

Do not point at people.
Do not use signal except in distress.

APPROVED MANUFACTURER BY M.L.I.T. JAPAN

KOA KAKO CO.,LTD.

2-13-9, Higashi-Nihonbashi, Chuo-ku, Tokyo, Japan

<http://www.koa-kako.co.jp>

e-mail:sales@koa-kako.co.jp

Tel:81-3-5835-2924

Fax:81-3-5835-1041