

SELF-ACTIVATING SMOKE SIGNAL KM83

In compliance with the requirements of the 1996 Amendments to the International Convention for the SOLAS, 1974, LSA code and IMO Resolution MSC. 81(70)

Self-activating Smoke Signal KM83, connected with lifebuoy, is used for saving person overboard.

This smoke signal is designed to generate dense orange smoke automatically for 15 minutes when thrown into the water and is also safe when used on the water covered with oil.

The rope on the top should be fixed to the ship body and the lower one should be attached to a lifebuoy.


EFFECTIVE PERIOD: 3 Years and 6 Months



INSTALLATION

For Manual

For Quick Release Fittings

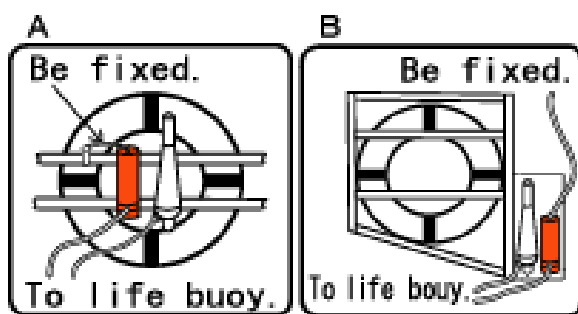

OPERATION

Throw signal with lifebuoy overboard automatically operated by quick release equipment, or manually.

Specification:

Smoke Color: Deep Orange

Smoke Time: Over 15 minutes.

Smoke Obscuration Rate: 70%

Tested Drop Height: 60m

Dimensions: ϕ 100mm \times 230mm

Weight: 1.63kg



WARNING



KEEP FIRE AWAY

Do not use signal except in distress.

★CAUTION

- ① Do not use signal except in distress.
- ② Time-expired signal should be returned to the maker.

APPROVED MANUFACTURER BY M.L.I.T. JAPAN

KOA KAKO CO.,LTD.

2-13-9, Higashi-Nihonbashi, Chuo-ku, Tokyo, Japan

<http://www.koa-kako.co.jp>

e-mail:sales@koa-kako.co.jp

Tel:81-3-5835-2924

Fax:81-3-5835-1041